





“Coined”  
edges prevent  
cable damage




- Robust "double-compression" design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20" (5,1 mm) to .30" (7,6 mm) in diameter.
- Designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel.
- 316 stainless steel now available for marine and other harsh environments.
- SunRunner fits module frames up to .125" ( 3,2 mm) thick.
- **SunRunner EZ designed for thicker module frames** as well as racking – accommodates profiles up to .250" (6,4 mm) thick!
- 304 stainless steel not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant

## HEYClip™ SunRunner® Cable Clip

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE	PART NO.		DESCRIPTION	FOOTPRINT HEIGHT		OVERALL	
Minimum	Maximum	Minimum	Maximum	304 Stainless	316 Stainless	A x B		C			
in.	mm.	in.	mm.	(2) Wires			in.	mm.	in.	mm.	
Double-Compression Design for panels up to .125" (3,2 mm) thick											
.06	1,4	.13	3,2	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6405	S6490	SunRunner® 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	S6495	SunRunner® Bulk				



SunRunner®  
(above)

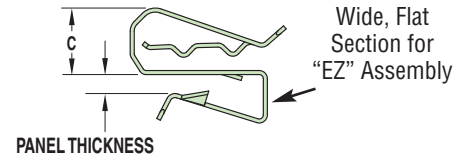

SunRunner® EZ  
(below)



SunRunner® EZ with (optional) SunBundler (page 1-11) looped through slot

## HEYClip™ SunRunner® EZ™ Cable Clip

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE	PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT		
Minimum	Maximum	Minimum	Maximum	304 Stainless	A x B		C				
in.	mm.	in.	mm.	(2) Wires		in.	mm.	in.	mm.		
Double-Compression Design for panels up to .250" (6,4 mm) thick											
.09	2,3	.25	6,4	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6407	SunRunner® EZ 100 Pack	.97 x .50	24,6 x 12,7	.41	10,4	
					S6447	SunRunner® EZ Bulk					



Quick  
Specs

Material .025" thick 304 or 316 stainless steel  
 Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523  
 Temperature Range -40°F (-40°C) to 572°F (300°C)

