


# Heyco® Nylon Arrow Clips



CHASSIS DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS							
GRIPPING RANGE						A		B		C		D	
Minimum		Maximum				Length		Clip Diameter		Head Diameter		Head Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.		
.062	1,6	.125	3,2	0315	AC 15	.390	9,9	.150	3,8	.280	7,1	.060	1,5
.125	3,2	.140	3,6	0313	AC 13	.318	8,1	.162	4,1				
.062	1,6	.125	3,2	0302	AC 2	.390	9,9	.162	4,1				
.290	7,4	.300	7,6	0314	AC 14	.530	13,5	.196	5,0				
.062	1,6	.145	3,7	0304	AC 4	.400	10,2	.180	4,6	.370	9,4		
.062	1,6	.125	3,2	0301	AC 1	.420	10,7	.225	5,7				
.165	4,2	.187	4,7	0311	AC 11	.518	13,2	.206	5,2				
.310	7,9	.330	8,4	0306	AC 6	.550	14,0	.225	5,7	.484	12,3		
.062	1,6	.125	3,2	0307	AC 7	.450	11,4						
.125	3,2	.187	4,7	0305	AC 5	.540	13,7	.248	6,3				
.125	3,2	.187	4,7	0309	AC 9	.575	14,6	.290	7,4				
.360	9,1	.380	9,7	0316	AC 16	.810	20,6	.245	6,2	.610	15,5	.065	1,7
.062	1,6	.340	8,6	0317	AC 17	.900	22,9	.375	9,5	.683	17,3	.070	1,8

Standard Color: White.

- Snap into mounting holes with fingertip pressure - no tools required.
- Offer a low cost way to assemble metal, plastic, composite, wood and other thin gauge materials.
- Hollow body design allows the clip to compress through the mounting hole, then expand back to original shape to lock assembled components securely.
- May be disassembled and reused.
- Vibration, abrasion and corrosion resistant.
- Molded of type 6/6 nylon. ASTM D-4066. Flammability classification 94V-2; temperature index 125° C.

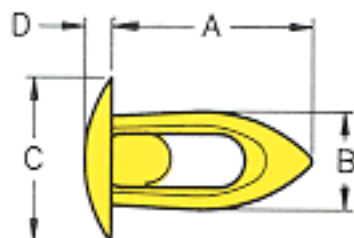

800-453-1692

<http://www.AboveBoardElectronics.com>