


Heyco® Nylon Push-in Fasteners



Maximum Chassis Thickness		PART NO.	DESCRIPTION	PART DIMENSIONS								Shank Diameter	
in.	mm.			A Overall Length		B Head Diameter		C Lock Length		D Lock Diameter		in.	mm.
.115	2,9	0339	PF 39	.240	6,1	.250	6,4	.085	2,2	.145	3,7	.093	2,4
.121	3,1	0347	PF 47	.286	7,2	.203	5,2	.125	3,2	.140	3,6	.115	2,9
.190	4,8	0342	PF 42	.320	8,1	.203	5,2	.090	2,3	.180	4,6	.130	3,3
.133	3,4	0350	PF 50	.310	7,9	.343	8,7	.137	3,5	.202	5,1	.165	4,2
.250	6,4	0353	PF 53	.484	12,3	.343	8,7	.174	4,4	.224	5,7	.180	4,6
.156	4,0	0360	PF 60	.359	9,1	.468	11,9	.153	3,9	.230	5,8	.200	5,1
.375	9,5	0361	PF 61	.552	14,0	.343	8,7	.137	3,5	.236	6,0		
.250	6,4	0371	PF 71	.497	12,6							.240	6,1
.375	9,5	0372	PF 72	.622	15,8	.593	15,1	.187	4,7	.295	7,5		
.480	12,2	0365	PF 65	.727	18,5								
.171	4,3	0370	PF 70	.418	10,6							.260	6,6

Standard Color: White.

- Snap into mounting holes with fingertip pressure- no tools required.
- Offer a low cost way to assemble metal, plastic, composite, wood and other thin gauge materials.
- Slotted leg design allows for both compression through the mounting hole and then expansion back to original shape -to lock assembled components securely.
- May be disassembled and reused.
- Vibration, abrasion and corrosion resistant.
- Molded of type 6/6 nylon. ASTM D-4066. Flammability classification 94V-2; temperature index 125° C.

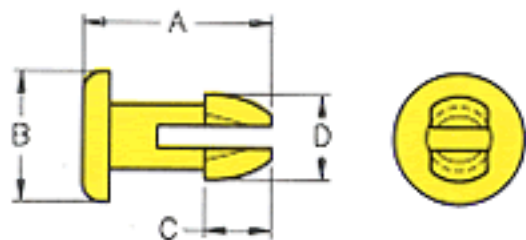

Heyco Products, Inc.

"The First Name in Wire Protection"

