




Heyco® Nylon Push Rivets

- Snap into mounting holes with fingertip pressure-no tools required.
- Rivet legs expand to securely lock components into place.
- Pull head up to release and disassemble.
- Molded of type 6 nylon.
Flammability classification 94V-2;
temperature index 105° C.

| CHASSIS DIMENSIONS | | | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | | | |
|------------------------|-----|----------------|---------|------|-----|----------|-------|-------------|-----------------|------|---------------|-----|-----------------|-----|
| Mounting Hole Diameter | | GRIPPING RANGE | | | | Black | White | | A Length | | B Head Height | | C Head Diameter | |
| | | Minimum | Maximum | | | | | | in. | mm. | in. | mm. | in. | mm. |
| in. | mm. | in. | mm. | in. | mm. | | | in. | mm. | in. | mm. | in. | mm. | |
| .106 | 2,7 | .039 | 1,0 | .071 | 1,8 | 9020 | 9021 | PR 106-039 | .126 | 3,2 | .055 | 1,4 | .197 | 5,0 |
| | | .071 | 1,8 | .102 | 2,6 | 9022 | 9023 | PR 106-071 | .157 | 4,0 | | | | |
| | | .102 | 2,6 | .134 | 3,4 | 9024 | 9025 | PR 106-102 | .189 | 4,8 | | | | |
| | | .134 | 3,4 | .165 | 4,2 | 9026 | 9027 | PR 106-134 | .220 | 5,6 | | | | |
| .122 | 3,1 | .039 | 1,0 | .079 | 2,0 | 9028 | 9029 | PR 122-039 | .138 | 3,5 | .063 | 1,6 | .252 | 6,4 |
| | | .079 | 2,0 | .118 | 3,0 | 9030 | 9031 | PR 122-079 | .177 | 4,5 | | | | |
| | | .118 | 3,0 | .157 | 4,0 | 9032 | 9033 | PR 122-118 | .217 | 5,5 | | | | |
| | | .157 | 4,0 | .197 | 5,0 | 9034 | 9035 | PR 122-157 | .256 | 6,5 | | | | |
| | | .217 | 5,5 | .256 | 6,5 | 9038 | 9039 | PR 122-217 | .315 | 8,0 | | | | |
| .142 | 3,6 | .079 | 2,0 | .118 | 3,0 | 9046 | 9047 | PR 142-079 | .177 | 4,5 | .071 | 1,8 | .315 | 8,0 |
| | | .098 | 2,5 | .138 | 3,5 | 9048 | 9049 | PR 142-098 | .197 | 5,0 | | | | |
| | | .118 | 3,0 | .157 | 4,0 | 9050 | 9051 | PR 142-118 | .217 | 5,5 | | | | |
| | | .177 | 4,5 | .217 | 5,5 | 9054 | 9055 | PR 142-177 | .276 | 7,0 | | | | |
| .161 | 4,1 | .098 | 2,5 | .138 | 3,5 | 9058 | 9059 | PR 161-098 | .197 | 5,0 | .087 | 2,2 | .354 | 9,0 |
| | | .138 | 3,5 | .177 | 4,5 | 9060 | 9061 | PR 161-138 | .236 | 6,0 | | | | |
| | | .177 | 4,5 | .217 | 5,5 | 9062 | 9063 | PR 161-177 | .276 | 7,0 | | | | |
| | | .217 | 5,5 | .256 | 6,5 | 9064 | 9065 | PR 161-217 | .315 | 8,0 | | | | |
| | | .295 | 7,5 | .335 | 8,5 | 9068 | 9069 | PR 161-295 | .394 | 10,0 | | | | |
| .201 | 5,1 | .059 | 1,5 | .098 | 2,5 | 9070 | 9071 | PR 201-059 | .177 | 4,5 | .087 | 2,2 | .354 | 9,0 |
| | | .098 | 2,5 | .138 | 3,5 | 9072 | 9073 | PR 201-098 | .217 | 5,5 | | | | |
| | | .138 | 3,5 | .177 | 4,5 | 9074 | 9075 | PR 201-138 | .256 | 6,5 | | | | |
| | | .177 | 4,5 | .217 | 5,5 | 9076 | 9077 | PR 201-177 | .295 | 7,5 | | | | |
| | | .217 | 5,5 | .256 | 6,5 | 9078 | 9079 | PR 201-217 | .335 | 8,5 | | | | |
| | | .256 | 6,5 | .295 | 7,5 | 9080 | 9081 | PR 201-256 | .374 | 9,5 | | | | |
| | | .295 | 7,5 | .335 | 8,5 | 9082 | 9083 | PR 201-295 | .413 | 10,5 | | | | |

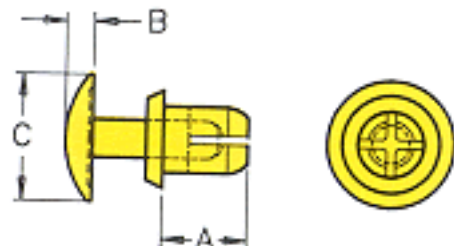

Standard Color: Black. White available at extra charge

Above Board Electronics
Specialty Fasteners and Electro-mechanical Components

800-453-1692

<http://www.AboveBoardElectronics.com>