

**0.150" PITCH  
FACE CONNECTOR**

PHYSICAL PROPERTIES

Housing:

HOUSING MATERIAL: Glass filled polyester

FLAMMABILITY: UL94V-0

COLOR: black

Terminal

CONTACT: Copper alloy, selective gold over nickel

SCREW: #3-48 steel, zinc plating with clear chromate coating

CAM: steel alloy, zinc plating with clear chromate coating

MECHANICAL

PITCH (TERMINAL SPACING): .150"

SCREWS: #3-48 steel, zinc plating with clear chromate coating

WIRE RANGE: 14-22 AWG (solid or stranded)

RECOMMENDED TIGHTENING TORQUE: 5 lb. in.

ELECTRICAL PROPERTIES


MAXIMUM CURRENT: 15A

OPERATING VOLTAGE: 300V

DIELECTRIC WITHSTAND: Tested to 1600V

ENVIRONMENTAL PROPERTIES

MAX. OPERATING TEMPERATURE: 130°C

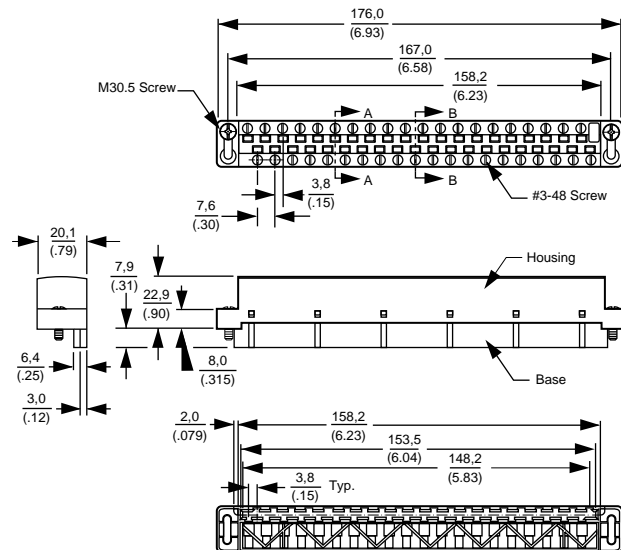

Ordering Information

CATALOG #	DESCRIPTION
FACE-40	40 circuit connector

